


Product Data Sheet

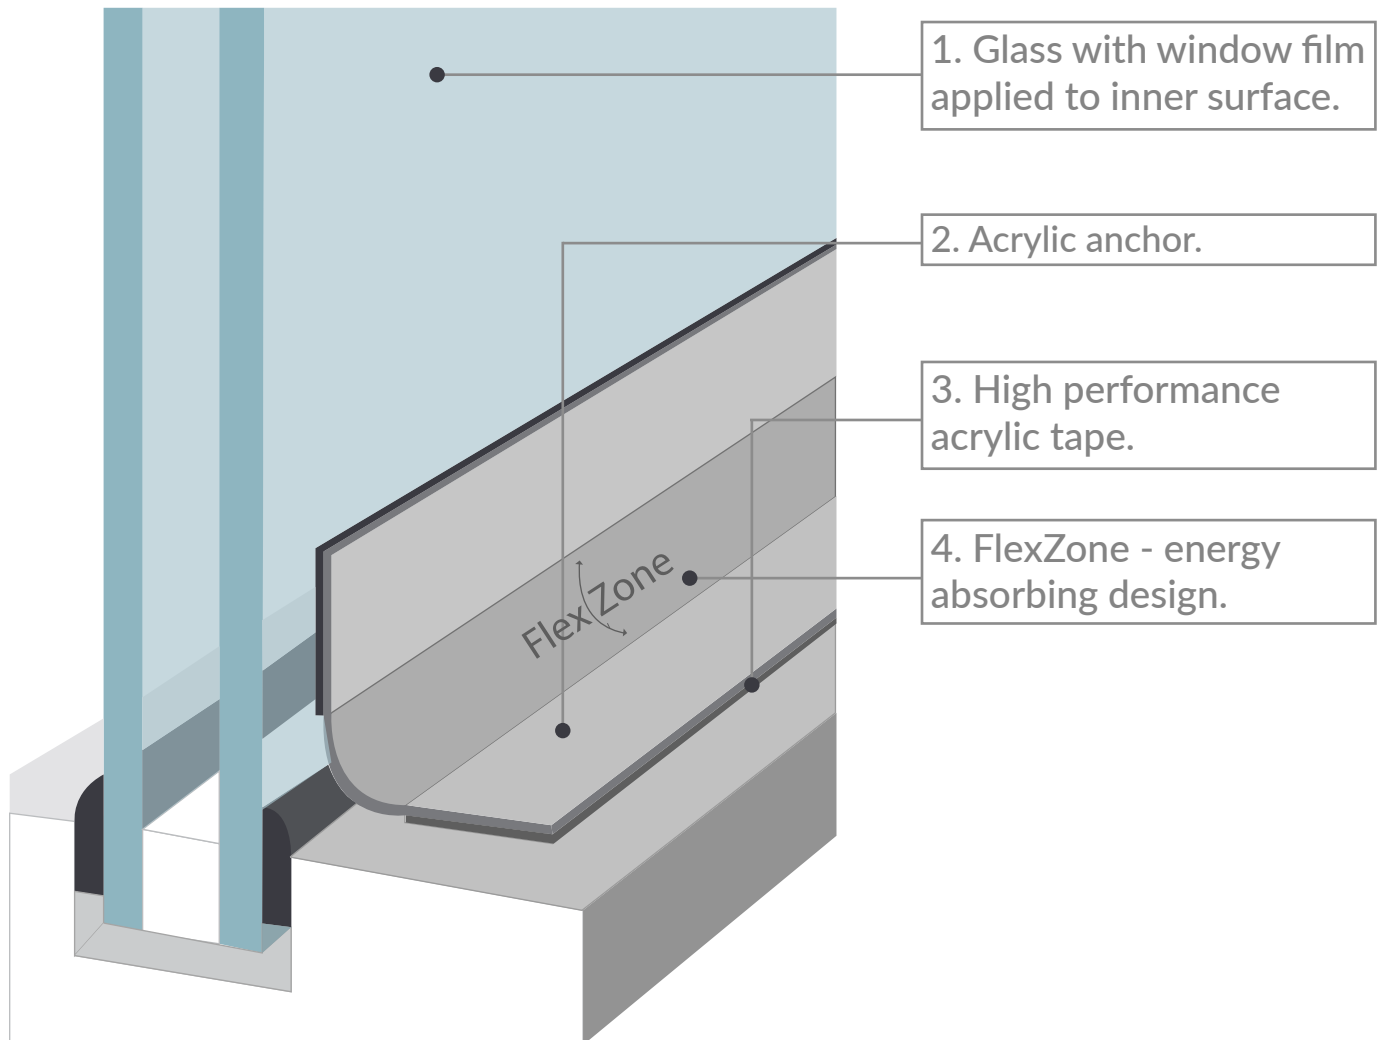

The OVAGLAS® Flexible Anchoring System is installed on all four sides of the window test specimens with adhesion to the powder coated aluminium frame and adhesion to the inner surface of the film.

The OVAGLAS® Flexible Anchoring System is designed to allow the daylight window film application of window film to be restrained within the window opening and prevent glass fragments or debris entering the test building interior. It is designed to delay the point at which the filmed glass pane enters the interior and works in combination with the window film to reduce hazard to occupants standing within 3m of the window.

Colours Available: Black, White & Grey (other colours available upon request.)

Sizes Available:

Small	(12mm + 5mm Flexzone + 12mm)
Medium	(12mm + 12mm Flexzone + 15mm)
Large	(15mm + 24mm Flexzone + 15mm)

Unique Characteristics:

- Reusable Materials
- ISO 16933 EXV25 at Comblasts Tests in 2019
- Tested & Certified using 100kg of TNT at 25 metres
- Patented Flexible Anchoring System